Better Built to Cook Your Largest Meals Fast

KEY FEATURES

- EvenAir™ True Convection
- Full-Width DuraClean™ Cast-Iron Burner Grates
- Griddle burner with on-top Griddle
- Power Preheat Feature

Maytag Gas Double Oven Freestanding Range

MGT8885X

MAYTAG®

Maytag® Gas Double Oven Freestanding Range

Product Specifications

Model	MGT8885X
Capacity (cu. ft.)	2.1/3.9
Electronic oven control system	•
Cooktop features	
Full-Width, DuraClean™ cast-iron burner grates	•
5K BTU burner	2
10K BTU burner	1
16K BTU SpeedHeat™ burner	1
7.35K BTU griddle burner	1
Oven features	
EvenAir® convection cooking system	True
Power preheat	•
Delay bake	•
Oven hold warm	•
Custom broil	Upper Over
Sabbath mode	•
Control lockout	•
Clock and timer	•
Automatic oven light	•
Rack (upper/lower)	1/2
Oven window	EasyView™
Self-Cleaning System	•
Overall features	
Metal Handle	(5) Stainless Steel

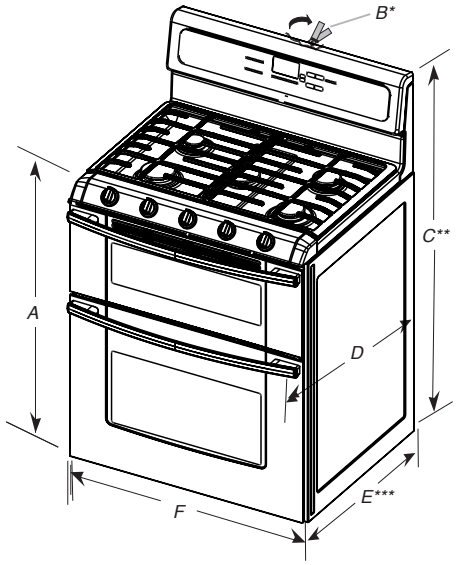

A. 35¾" ± ⅛" (90.8 ± 0.3 cm) cooktop height (minimum) with leveling legs screwed all the way in
*B. Model/serial/rating plates (located behind the control panel)**
*C. 47⅛" ± ⅛" (119.7 ± 0.3 cm) overall height (minimum) with leveling legs screwed all the way in***
D. 28½" ± ¼" (72.4 ± 0.6 cm) depth with handle
*E. 26⅛" to 27" ± ⅛" (66.4 ± 0.3 cm)****
F. 29 15/16" ± 1/16" (76.0 ± 0.2 cm) width

*Model/serial/rating plates may be rotated up from behind the control panel for viewing from the front of the range.

**Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

***Excludes handle. Dimension given is from wall to front of oven door and will vary based on electrical outlet receptacle installation.

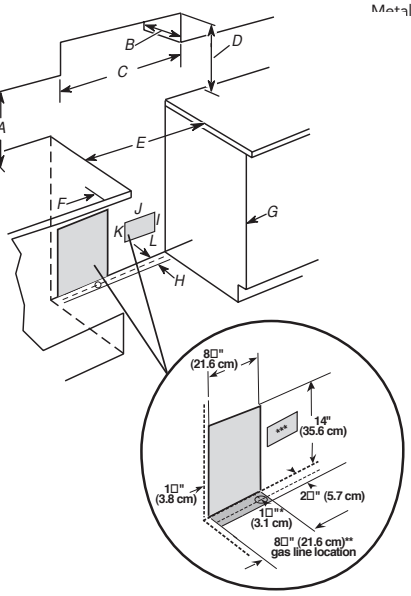

A. 18" (45.7 cm) upper cabinet to countertop
B. 13" (33.0 cm) upper cabinet depth
C. 30" (76.2 cm) min. opening width
D. For minimum clearance to the top of the cooktop, see NOTE.
E. 30" (76.2 cm) min. opening width
F. 3" (7.6 cm) min. clearance from both sides of the range to the side wall or other combustible material.
G. Cabinet door or hinges should not extend into the cutout.
H. 3" (7.6 cm) distance from wall
I. 1½" (3.8 cm) min. from right side cabinet
J. 8" (20.3 cm) width
K. 7" (17.8 cm) min. from floor
L. 2" (5.1 cm) min. from floor

*Drill on centerline 1" (3.1 cm) from rear wall for gas supply line.

**Gas lines must be installed within the shaded area to ensure proper alignment of this oven with cabinets.

***Electrical plugs must be installed within the shaded area to ensure proper alignment of this oven with cabinets.

NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed with zero clearance to combustible construction at the rear and on the sides below the cooktop.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

MAYTAG®

Built Strong to Last Long.

maytag.com

*®Registered trademark/™Trademark of Maytag Corporation or its related companies. ©2010. All rights reserved. AA003100